

T·A·P® CRAWL SPACE SYSTEM

T·A·P® Crawl Space System featuring ComfortTherm® Fiberglass Insulation



Overview

Complimenting the TAP® Attic Capping Program is the TAP® Crawlspace Insulation System featuring ComfortTherm® polyencapsulated fiberglass batts. It's the ideal product to rid a home of cold floors, reduce sound infiltration, decrease your customer's energy costs, and add the perfect compliment to your TAP® Pest Control Insulation business.

Performance Features:

- ComfortTherm® is not a food source for pests
- Mold-Resistant, does not support mold or mildew
- Formaldehyde-Free™ - promotes better indoor air quality
- Poly-encapsulated - wrapped in plastic for cleaner, more comfortable installation with less itch, irritation, and dust
- Thermally Efficient - provides effective resistance to heat or cold transfer with a variety of R-values
- Acoustically Efficient - reduces sound transmission through floor systems
- Fire-Resistant and Noncombustible
- Controls Moisture - the plastic facing is a vapor retarder that resists water vapor transmission. In hot, humid areas, ComfortTherm® comes with a perforated plastic facing that does not act as a vapor-retarder.
- Noncorrosive - does not promote corrosion of pipes, wiring, or metal studs.
- Damage Resistant - ComfortTherm's® poly sheathing protects it in harsh underfloor environments.

Installation

ComfortTherm® batts cut easily with an ordinary utility knife and are sized to fit standard cavities. The batts are placed between joists and secured with Tiger Teeth (wire hangers) pressed between the floor joists and against the insulation. Once installed, ComfortTherm® should be in contact with the subfloor, leaving no gaps. The plastic facing of standard ComfortTherm® is a vapor retarder, and in colder climates, is placed toward the heated or conditioned side of the floor. In predominantly hot, humid climates, many codes make vapor-retarder use optional. ComfortTherm® with a non-vapor-retarder facing is available for these areas.

Packaging and Pricing

ComfortTherm® Insulation is available nationwide and comes in batts. It is compression-packed in plastic bags for savings in storage and freight costs. Available in LTL quantities (min 1 pallet - approximately 1,743 sq. ft.). For the best value, order a half or full truckload* (approximately 54,000 sq. ft.) delivered to your location!


*Truckload contains loose bundles only, no pallets. Lift gates are not available on delivery trucks.



Comes in batts



Less itch

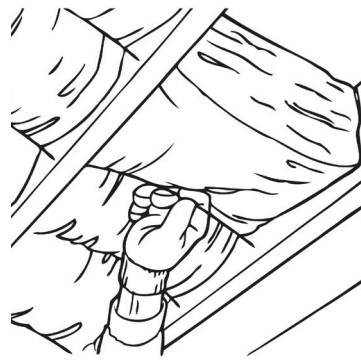

Easy to install with wire staves



T·A·P® CRAWL SPACE SYSTEM

T·A·P® Crawl Space System featuring ComfortTherm® Fiberglass Insulation



Product Description

ComfortTherm® crawl space fiberglass insulation is a preferred high permeability product with perforated top and bottom to help prevent moisture accumulation against sub-flooring in humid environments (drier climates will get non-perforated vapor retarder product). Each batt is wrapped in a poly film, totally encapsulated with only the ends exposed resulting in easier installation and very little itch or irritation. Additionally, ComfortTherm® is formaldehyde free! Note: ComfortTherm® is not a pest control insulation.

R-Values Available

R-19	15" X 93" Batt	36 Batts per bundle	1 Bundle = 348.72 sq. ft.	5 Bundles per Pallet	1,743.65 sq. ft.
R-19	16" X 48" Batt	72 Batts per bundle	1 Bundle = 384 sq. ft.	4 Bundles per Pallet	1536 sq. ft.
R-19	23" X 93" Batt	36 Batts per bundle	1 Bundle = 534.72 sq. ft.	3 Bundles per Pallet	1,609.16 sq. ft.
R-19	24" X 48" Batt	72 Batts per bundle	1 Bundle = 576 sq. ft.	3 Bundles per Pallet	1728 sq. ft.
R-30	16" X 48" Batt	44 Batts per bundle	1 Bundle = 234.64 sq. ft.	4 Bundles per Pallet	938.56 sq. ft.
R-30	24" X 48" Batt	44 Batts per bundle	1 Bundle = 352 sq. ft.	3 Bundles per Pallet	1,056.00 sq. ft.

Freight Information

- Free shipping on half or full truck loads (lift gate not available)
- Batts are loose loaded and are not available on pallets
- Please allow four to seven business days for delivery

